


Fixture MI-BUBBLE-02

Ref. FPMI002



- Module for building shapes MI-BUBBLES in the MIFOR-70 system
- Also applicable as a standalone lighting fixture
- Includes a light source and a wire suspension system
- Easy suspension height adjustment
- Compatible with lighting control including Casambi (Bluetooth), DALI, 0-10V

TECHNICAL DRAWING

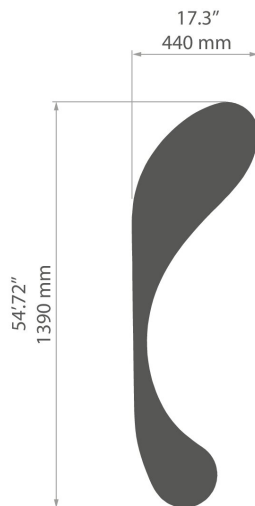

TECHNICAL SPECIFICATIONS

Material	aluminum
Cover	frosted
Control	ON/OFF
Mounting type	suspended
Length [L]	1390 mm
Height H	87.2 mm
Width [W]	440 mm
Weight	3.7 kg
Lighting direction	down
IP protection rating	20
Luminare power	57 W
Color Rendering Index CRI	90
MacAdam's ellipse	3 SDCM

Color	Luminous flux of the fixture	Efficiency	Color temperature	Ref
■ silver anodized	4950 lm	86 lm/W	3000 K	FPMI002-01300B
■ silver anodized	5130 lm	90 lm/W	4000 K	FPMI002-01400B
■ black anodized	4950 lm	86 lm/W	3000 K	FPMI002-07300B
■ black anodized	5130 lm	90 lm/W	4000 K	FPMI002-07400B
□ white lacquered mat	4950 lm	86 lm/W	3000 K	FPMI002-10300B
□ white lacquered mat	5130 lm	90 lm/W	4000 K	FPMI002-10400B

Fixture MI-BUBBLE-02

Ref. FPMI002

Input voltage	24 V
Protection class	III
Working temperature	10°C - 35°C

SAMPLE PROJECTS

