



Fixture MI-BUBBLE-04

Ref. FPMI004

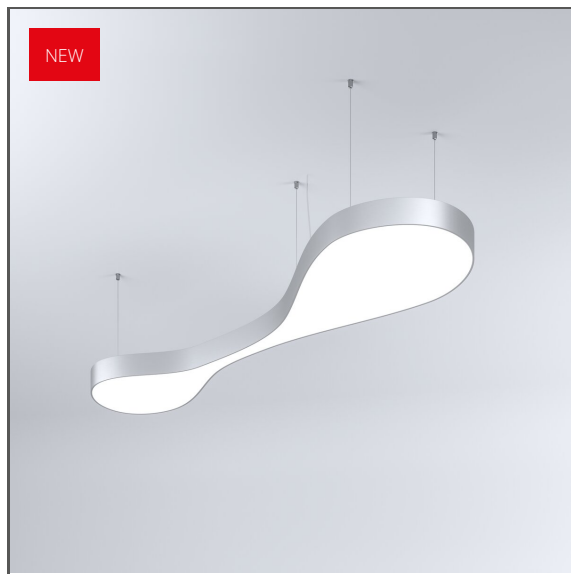

- Module for building shapes MI-BUBBLES in the MIFOR-70 system
- Also applicable as a standalone lighting fixture
- Includes a light source and a wire suspension system
- Easy suspension height adjustment
- Compatible with lighting control including Casambi (Bluetooth), DALI, 0-10V

TECHNICAL DRAWING

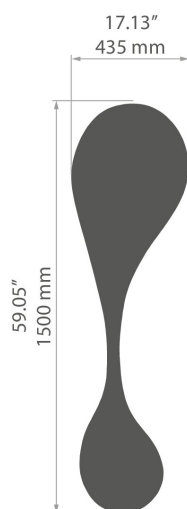

TECHNICAL SPECIFICATIONS

Material	aluminum
Cover	frosted
Control	ON/OFF
Mounting type	suspended
Length [L]	1500 mm
Height H	87.2 mm
Width [W]	435 mm
Weight	4.5 kg
Lighting direction	down
IP protection rating	20
Luminare power	78 W
Color Rendering Index CRI	90
MacAdam's ellipse	3 SDCM

Color	Luminous flux of the fixture	Efficiency	Color temperature	Ref
■ silver anodized	6910 lm	88 lm/W	3000 K	FPMI004-01300B
■ silver anodized	7160 lm	91 lm/W	4000 K	FPMI004-01400B
■ black anodized	6910 lm	88 lm/W	3000 K	FPMI004-07300B
■ black anodized	7160 lm	91 lm/W	4000 K	FPMI004-07400B
□ white lacquered mat	6910 lm	88 lm/W	3000 K	FPMI004-10300B
□ white lacquered mat	7160 lm	91 lm/W	4000 K	FPMI004-10400B

Fixture MI-BUBBLE-04

Ref. FPMI004

Input voltage	24 V
Protection class	III
Working temperature	10°C - 35°C

SAMPLE PROJECTS

