



Fixture MI-SNAKE-02

Ref. FPMI042

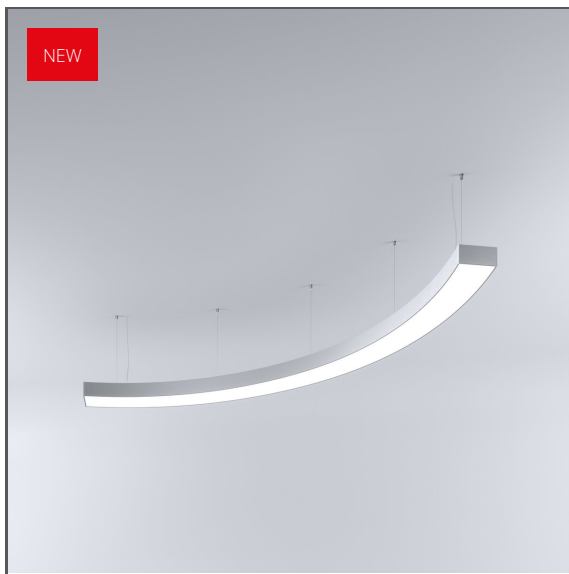

- Module for building shapes MI-SNAKE in the MIFOR-70 system
- Also applicable as a standalone lighting fixture
- Includes a light source and a wire suspension system
- Easy suspension height adjustment
- Compatible with lighting control including Casambi (Bluetooth), DALI, 0-10V

TECHNICAL DRAWING

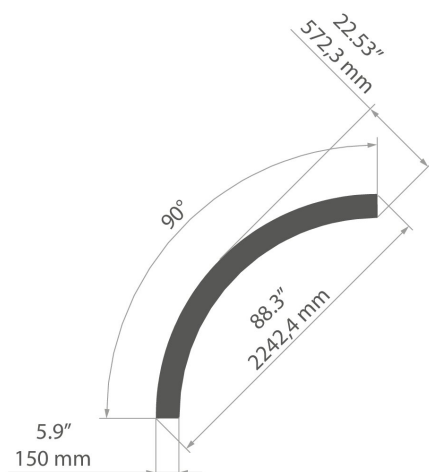

TECHNICAL SPECIFICATIONS

Material	aluminum
Cover	frosted
Control	ON/OFF
Mounting type	suspended
Length [L]	2242.4 mm
Height H	87.2 mm
Width [W]	572.3 mm
Weight	5.2 kg
Lighting direction	down
IP protection rating	20
Luminare power	70 W
Color Rendering Index CRI	90
MacAdam's ellipse	3 SDCM

Color	Luminous flux of the fixture	Efficiency	Color temperature	Ref
■ silver anodized	6320 lm	90 lm/W	3000 K	FPMI042-01300B
■ silver anodized	6560 lm	93 lm/W	4000 K	FPMI042-01400B
■ black anodized	6320 lm	90 lm/W	3000 K	FPMI042-07300B
■ black anodized	6560 lm	93 lm/W	4000 K	FPMI042-07400B
□ white lacquered mat	6320 lm	90 lm/W	3000 K	FPMI042-10300B
□ white lacquered mat	6560 lm	93 lm/W	4000 K	FPMI042-10400B

Fixture MI-SNAKE-02

Ref. FPMI042

Input voltage	24 V
Protection class	III
Working temperature	10°C - 35°C

SAMPLE PROJECTS

