



# Fixture MI-SNAKE-04

Ref. FPMI044

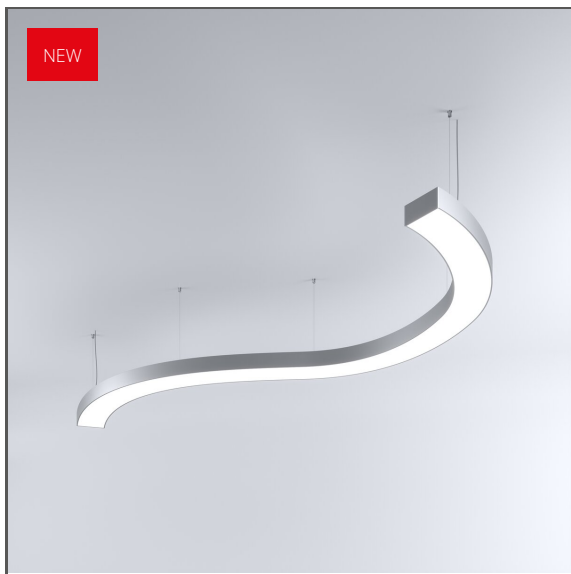

- Module for building shapes MI-SNAKE in the MIFOR-70 system
- Also applicable as a standalone lighting fixture
- Includes a light source and a wire suspension system
- Easy suspension height adjustment
- Compatible with lighting control including Casambi (Bluetooth), DALI, 0-10V

## TECHNICAL DRAWING

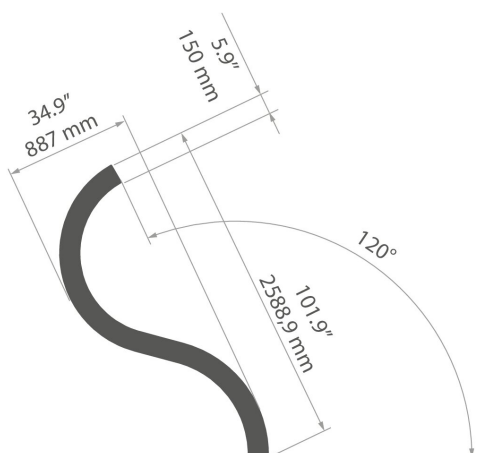

## TECHNICAL SPECIFICATIONS

Material	aluminum
Cover	frosted
Control	ON/OFF
Mounting type	suspended
Length [L]	2588.9 mm
Height H	87.2 mm
Width [W]	887 mm
Weight	6.6 kg
Lighting direction	down
IP protection rating	20
Luminare power	91 W
Color Rendering Index CRI	90
MacAdam's ellipse	3 SDCM

Color	Luminous flux of the fixture	Efficiency	Color temperature	Ref
■ silver anodized	8330 lm	91 lm/W	3000 K	FPMI044-01300B
■ silver anodized	8640 lm	94 lm/W	4000 K	FPMI044-01400B
■ black anodized	8330 lm	91 lm/W	3000 K	FPMI044-07300B
■ black anodized	8640 lm	94 lm/W	4000 K	FPMI044-07400B
□ white lacquered mat	8330 lm	91 lm/W	3000 K	FPMI044-10300B
□ white lacquered mat	8640 lm	94 lm/W	4000 K	FPMI044-10400B

# Fixture MI-SNAKE-04

Ref. FPMI044

---

---

Input voltage	24 V
Protection class	III
Working temperature	10°C - 35°C

---

## SAMPLE PROJECTS

