


Fixture MI-SNAKE-07

Ref. FPMI047



- Module for building shapes MI-SNAKE in the MIFOR-70 system
- Also applicable as a standalone lighting fixture
- Includes a light source and a wire suspension system
- Easy suspension height adjustment
- Compatible with lighting control including Casambi (Bluetooth), DALI, 0-10V

TECHNICAL DRAWING

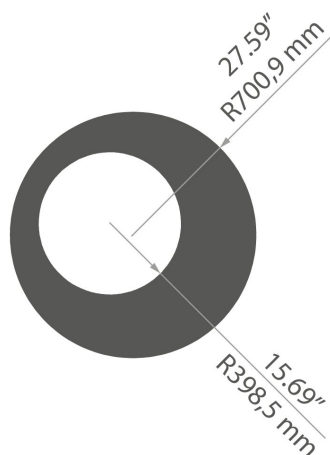

TECHNICAL SPECIFICATIONS

Material	aluminum
Cover	frosted
Control	ON/OFF
Mounting type	suspended
Length [L]	1401.8 mm
Height H	87.2 mm
Width [W]	1401.8 mm
Weight	4.9 kg
Lighting direction	down
IP protection rating	20
Luminare power	107 W
Color Rendering Index CRI	90
MacAdam's ellipse	3 SDCM

Color	Luminous flux of the fixture	Efficiency	Color temperature	Ref
■ silver anodized	10040 lm	93 lm/W	3000 K	FPMI047-01300B
■ silver anodized	10410 lm	97 lm/W	4000 K	FPMI047-01400B
■ black anodized	10040 lm	93 lm/W	3000 K	FPMI047-07300B
■ black anodized	10410 lm	97 lm/W	4000 K	FPMI047-07400B
□ white lacquered mat	10040 lm	93 lm/W	3000 K	FPMI047-10300B
□ white lacquered mat	10410 lm	97 lm/W	4000 K	FPMI047-10400B

Fixture MI-SNAKE-07

Ref. FPMI047

Input voltage	24 V
Protection class	III
Working temperature	10°C - 35°C

SAMPLE PROJECTS

