


Fixture MI-WAVE-02

Ref. FPMI012



- Module for building shapes MI-WAVE in the MIFOR-70 system
- Also applicable as a standalone lighting fixture
- Includes a light source and a wire suspension system
- Easy suspension height adjustment
- Compatible with lighting control including Casambi (Bluetooth), DALI, 0-10V

TECHNICAL DRAWING

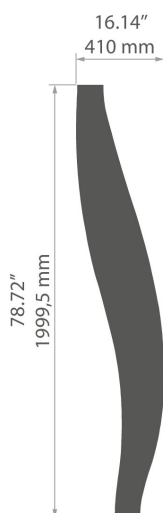

TECHNICAL SPECIFICATIONS

| | |
|---------------------------|-----------|
| Material | aluminum |
| Cover | frosted |
| Control | ON/OFF |
| Mounting type | suspended |
| Length [L] | 2000 mm |
| Height H | 87.2 mm |
| Width [W] | 410 mm |
| Weight | 5.1 kg |
| Lighting direction | down |
| IP protection rating | 20 |
| Luminare power | 94 W |
| Color Rendering Index CRI | 90 |
| MacAdam's ellipse | 3 SDCM |

| Color | Luminous flux of the fixture | Efficiency | Color temperature | Ref |
|-----------------------|------------------------------|------------|-------------------|----------------|
| ■ silver anodized | 8600 lm | 91 lm/W | 3000 K | FPMI012-01300B |
| ■ silver anodized | 8920 lm | 94 lm/W | 4000 K | FPMI012-01400B |
| ■ black anodized | 8600 lm | 91 lm/W | 3000 K | FPMI012-07300B |
| ■ black anodized | 8920 lm | 94 lm/W | 4000 K | FPMI012-07400B |
| □ white lacquered mat | 8600 lm | 91 lm/W | 3000 K | FPMI012-10300B |
| □ white lacquered mat | 8920 lm | 94 lm/W | 4000 K | FPMI012-10400B |

Fixture MI-WAVE-02

Ref. FPMI012

| | |
|---------------------|-------------|
| Input voltage | 24 V |
| Protection class | III |
| Working temperature | 10°C - 35°C |

SAMPLE PROJECTS

