


# Fixture MI-WAVE-03

Ref. FPMI013



- Module for building shapes MI-WAVE in the MIFOR-70 system
- Also applicable as a standalone lighting fixture
- Includes a light source and a wire suspension system
- Easy suspension height adjustment
- Compatible with lighting control including Casambi (Bluetooth), DALI, 0-10V

## TECHNICAL DRAWING

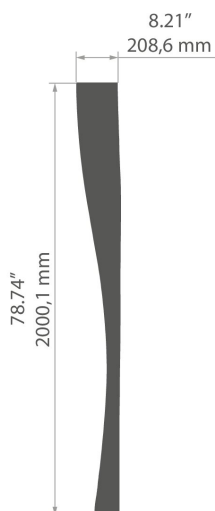

## TECHNICAL SPECIFICATIONS

Material	aluminum
Cover	frosted
Control	ON/OFF
Mounting type	suspended
Length [L]	2000 mm
Height H	87.2 mm
Width [W]	208.6 mm
Weight	3.84 kg
Lighting direction	down
IP protection rating	20
Luminare power	52 W
Color Rendering Index CRI	90
MacAdam's ellipse	3 SDCM

Color	Luminous flux of the fixture	Efficiency	Color temperature	Ref
■ silver anodized	4380 lm	84 lm/W	3000 K	FPMI013-01300B
■ silver anodized	4550 lm	87 lm/W	4000 K	FPMI013-01400B
■ black anodized	4380 lm	84 lm/W	3000 K	FPMI013-07300B
■ black anodized	4550 lm	87 lm/W	4000 K	FPMI013-07400B
□ white lacquered mat	4380 lm	84 lm/W	3000 K	FPMI013-10300B
□ white lacquered mat	4550 lm	87 lm/W	4000 K	FPMI013-10400B

# Fixture MI-WAVE-03

Ref. FPMI013

---

Input voltage	24 V
Protection class	III
Working temperature	10°C - 35°C

---

## SAMPLE PROJECTS

