


Fixture MI-WAVE-04

Ref. FPMI014



- Module for building shapes MI-WAVE in the MIFOR-70 system
- Also applicable as a standalone lighting fixture
- Includes a light source and a wire suspension system
- Easy suspension height adjustment
- Compatible with lighting control including Casambi (Bluetooth), DALI, 0-10V

TECHNICAL DRAWING

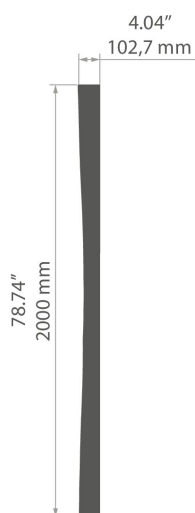

TECHNICAL SPECIFICATIONS

Material	aluminum
Cover	frosted
Control	ON/OFF
Mounting type	suspended
Length [L]	2000 mm
Height H	87.2 mm
Width [W]	102.7 mm
Weight	3.3 kg
Lighting direction	down
IP protection rating	20
Luminare power	45 W
Color Rendering Index CRI	90
MacAdam's ellipse	3 SDCM

Color	Luminous flux of the fixture	Efficiency	Color temperature	Ref
■ silver anodized	3410 lm	75 lm/W	3000 K	FPMI014-01300B
■ silver anodized	3530 lm	78 lm/W	4000 K	FPMI014-01400B
■ black anodized	3410 lm	75 lm/W	3000 K	FPMI014-07300B
■ black anodized	3530 lm	78 lm/W	4000 K	FPMI014-07400B
□ white lacquered mat	3410 lm	75 lm/W	3000 K	FPMI014-10300B
□ white lacquered mat	3530 lm	78 lm/W	4000 K	FPMI014-10400B

Fixture MI-WAVE-04

Ref. FPMI014

Input voltage	24 V
Protection class	III
Working temperature	10°C - 35°C

SAMPLE PROJECTS

