


# Profile KIDES

Ref. A18031

Ref. arch 18031

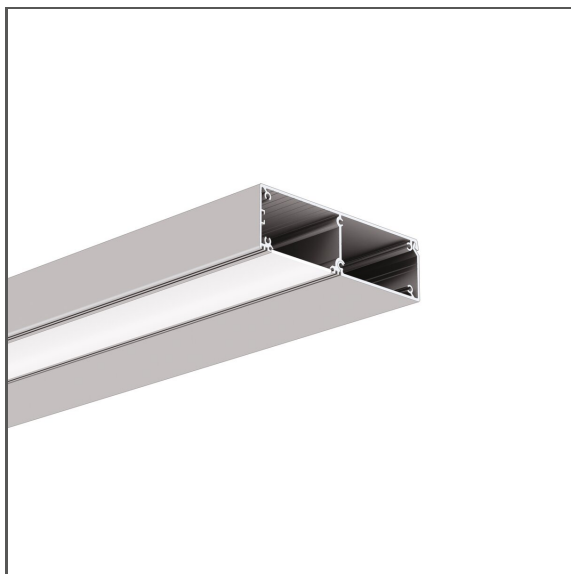

- Designed for IP54 protection rating
- Possibility to obtain UGR < 19
- Compartment for driver and electrical components
- Easy maintenance

## APPLICATION

- decorative lighting

## MOUNTING


- to the surface, using a dedicated mounting track and properly selected screws

## ADDITIONAL INFORMATION

- the power supply can be secured inside the profile using dedicated accessories
- standard lengths of KLUŚ profiles and covers: 1000 mm (tolerance ± 1.5 mm) and 2005 mm / 3010 mm (tolerance + 5 mm); for selected covers: 6050 mm, 10050 mm (tolerance + 5 mm)
- when choosing a different length of profiles / covers than available in the standard, you should additionally choose the cutting service at KLUŚ

## TECHNICAL DRAWING

1:2

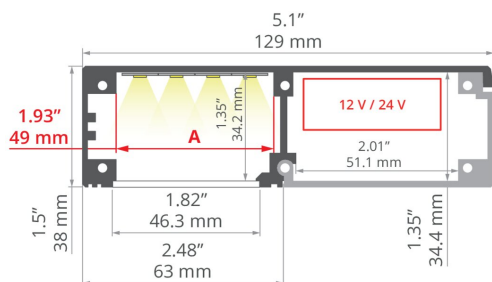

## TECHNICAL SPECIFICATIONS






Material	aluminum
Color	■ silver anodized
Possible fixture IP	54
Possible fixture shapes	linear
Profile cross-section	rectangular
Width	129 mm
Height	38 mm
LED gluing width A	49 mm
Number of LED strips A (8 mm wide)	6
Compartment for power supply	yes
Possibility of obtaining a line of light	yes
Building type	Commercial, HoReCa object, Outdoor
Facility zone	wall lighting, office, communication routes and corridors, fascade lighting
The cover is cut to the length of the profile	yes
Wire out back of extrusion	yes

Length	Ref
1000 mm	A18031A_1 18031ANODA_1
2005 mm	A18031A_2 18031ANODA_2
3010 mm	A18031A_3 18031ANODA_3







## SAMPLE PROJECTS




## RELATED ACCESSORIES > RELATED COVERS

NAME	MATERIAL	MATERIAL TRANSMITTANCE	COLOR	REF.	
DHS		73 %	 frosted	B17052M 17052	
		94 %	 clear	B17052T 17063	
JUN-47		PMMA	92 %	 clear	B17059P 17059

## RELATED ACCESSORIES > RELATED END CAPS

NAME	MATERIAL	COLOR	REF.
KIDES	 stainless steel, aluminum, TPE	 silver	C28210A01 42617
KIDESIN	 PP	 silver	C24152L01 24152
KIDES-HQ	 aluminum	 gray	C28220AS 42628

### RELATED ACCESSORIES > RELATED LED



**K-1210-12V**

K-1210-12

Ref. arch K-1210-12V



**K-1275-12V**

K-1275-12


Ref. arch K-1275-12V



**WP-K-1220-12V**

KWP-1220-12


Ref. arch WP-K-1220-12V



**WP-K-1275-12V**

KWP-1275-12


Ref. arch WP-K-1275-12V



**WP-K-1220-IP65-12V**

\_błąd

Ref. arch WP-K-1220-IP65-12V




**K-1275-RGB-12V**

K-RGB-1275-12

Ref. arch K-1275-RGB-12V


### RELATED ACCESSORIES > RELATED LED > HIGH EFFICACY

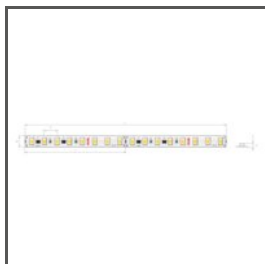

**K-HE-0480-HD-24V**

K-HEHD-0480-24

Ref. arch K-HE-0480-HD-24V



**K-HE-0960-HD-24V**

K-HEHD-0960-24


Ref. arch K-HE-0960-HD-24V



**K-HE-1440-HD-24V**

K-HEHD-1440-24

Ref. arch K-HE-1440-HD-24V

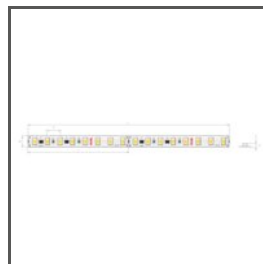

**K-HE-1920-HD-24V**

K-HEHD-1920-24

Ref. arch K-HE-1920-HD-24V


### RELATED ACCESSORIES > RELATED LED > RGB / RGB-W / RGB-CTT



**WP-K-1530-RGB+W-24V**

KWP-RGBW-1530-24

Ref. arch WP-K-1530-RGB+W-24V



**K-1920-120-RGB-24V**

K-RGB-1920-120-24

Ref. arch K-1920-120-RGB-24V



**WP-K-1920-120-RGB-24V**

KWP-1920-120-RGB-24

Ref. arch WP-K-1920-120-RGB-24V

RELATED ACCESSORIES > RELATED LED > WHITE MONO



**WP-K-1640-HD-IP65-24V**

KWP-GHD-1640-24

Ref. arch WP-K-1640-HD-IP65-24V



**WP-K-1220-IP65-24V**

KWP-1220-IP65-24

Ref. arch WP-K-1220-IP65-24V

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > CONDUCTIVE FASTENERS AND HEADS FOR SURFACE



FASTENER

**W-BOX-Z**

C28253N00

Ref. arch 00643

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > CONNECTORS



CONNECTOR

**ZM-180**

C28075N00

Ref. arch 40693

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > OTHER



GLAND

**6x1,2**

C24517C07

Ref. arch 00802



GLAND

**19x1,6**

C24519C07

Ref. arch 00820