


Profile KOZEL-10

Ref. A01575

Ref. arch C1575

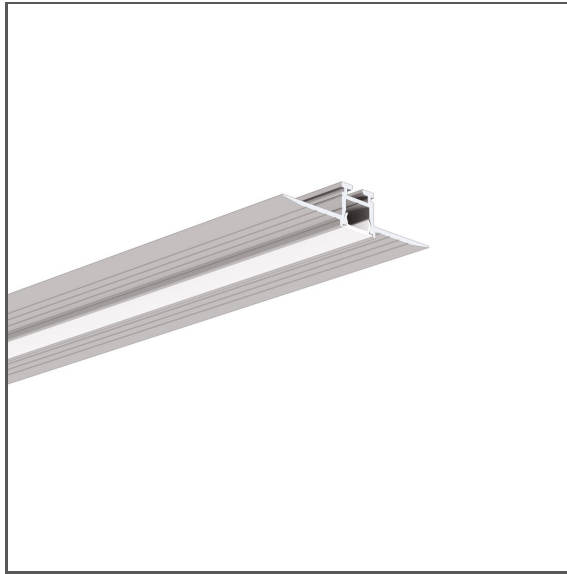

- Mounting to drywall
- Minimum height
- No collision with the ceiling structure
- Line of light flush with the surface
- Non visible aluminum elements

APPLICATION

- decorative lighting


MOUNTING

- in drywall, with mounting adhesive
- can be easily connected into runs and systems

ADDITIONAL INFORMATION

- in order to protect the lighting fixture during installation, a TECH-10 protective insert should be used
- smooth transition from a recessed into a suspended fixture
- standard lengths of KLUŚ profiles and covers: 1000 mm (tolerance ± 1.5 mm) and 2005 mm / 3010 mm (tolerance + 5 mm); for selected covers: 6050 mm, 10050 mm (tolerance + 5 mm)
- when choosing a different length of profiles / covers than available in the standard, you should additionally choose the cutting service at KLUŚ

TECHNICAL DRAWING

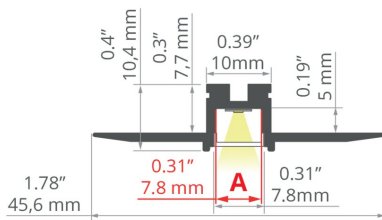

TECHNICAL SPECIFICATIONS

Material	aluminum
Color	■ silver non anodized
Possible fixture IP	20
Possible fixture shapes	linear, polygonal
Profile cross-section	rectangular
Width	45.6 mm
Height	10.4 mm
LED gluing width A	7.8 mm
Max power of a single KLUŚ LED strip	9.6 W/m
Building type	Commercial, Retail, Residential, HoReCa object, Entertainment/Arts
Facility zone	communication routes and corridors, bathroom, lobby / foyer, office, conference room
The cover is cut to the length of the profile	yes
Can be easily connected into runs	yes
Mounting to drywall	yes
To cover with plaster	yes

Length	Ref
1000 mm	A01575N_1 C1575NA_1
2005 mm	A01575N_2 C1575NA_2
3010 mm	A01575N_3 C1575NA_3

Profile KOZEL-10




Ref. A01575

Ref. arch C1575



Wire out back of extrusion

yes

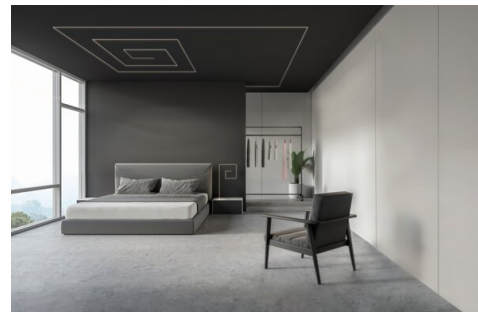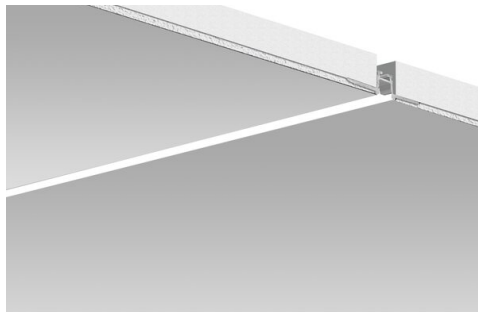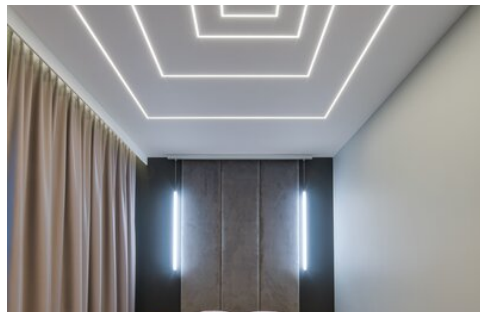SAMPLE PROJECTS





RELATED ACCESSORIES > COVERS

NAME		MATERIAL	MATERIAL TRANSMITTANCE	COLOR	REF.
PIKO		PMMA	57 %	satin	B17034S 17034
BENCO		silicon	58 %	frosted	B17069F 17069F

NEW

RELATED ACCESSORIES > END CAPS

NAME		MATERIAL	COLOR	REF.
PIKO-ZM		ABS	gray	C24307C02 24307
			black	C24307C07 24384
PIKO-ZM-OTW		ABS	gray	C24307C02TW 24359
			black	C24307C07TW 24400

RELATED ACCESSORIES > RELATED LED



KWP-5KSHD-0960-24


KWP-5KSHD-0960-24

Profile KOZEL-10

Ref. A01575

Ref. arch C1575

RELATED ACCESSORIES > RELATED LED > RGB / RGB-W / RGB-CTT



K-1560-RGB-24V

K-RGB-1560-24

Ref. arch K-1560-RGB-24V

RELATED ACCESSORIES > RELATED LED > ULTRATHIN



K-1091-24V

K-1091-24

Ref. arch K-1091-24V


RELATED ACCESSORIES > RELATED LED > WHITE MONO



5K-WP-K-1091-24V

KWP-5K-1091-24

Ref. arch 5K-WP-K-1091-24V



K-SHD-0960-24

K-SHD-0960-24

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > CONNECTORS



CONNECTOR

ZM-NA-90

42723



CONNECTOR

ZM-NA-PION-135

42727



CONNECTOR

ZM-NA-PION-120

42321



CONNECTOR

ZM-NA-60

42305

Profile KOZEL-10

Ref. A01575

Ref. arch C1575

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > TECHNICAL AND PROTECTIVE INSERTS



PROTECTIVE INSERT

TECH-10

C24533C02

Ref. arch 17126