


Profile PAC-ALU

Ref. A04370

Ref. arch B4370

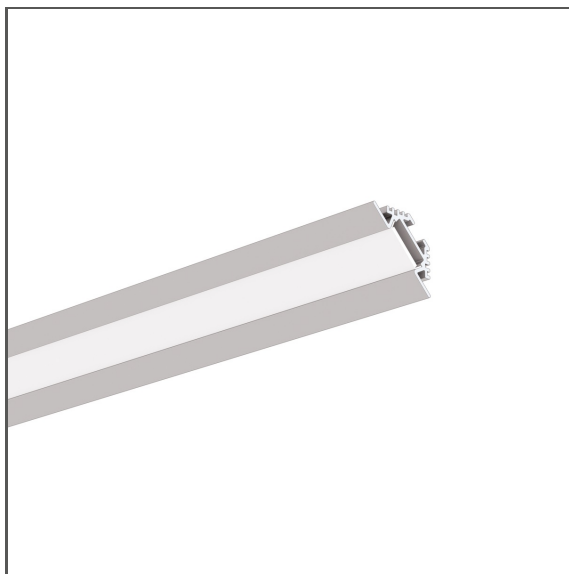

- Installation in corners
- Corner masking
- Lighting angle: 45 Degrees

APPLICATION

- furniture, under-cabinet and decorative lighting


MOUNTING

- to the surface, using dedicated accessories, mounting adhesive or properly selected screws

ADDITIONAL INFORMATION

- standard lengths of KLUŚ profiles and covers: 1000 mm (tolerance ± 1.5 mm) and 2005 mm / 3010 mm (tolerance + 5 mm); for selected covers: 6050 mm, 10050 mm (tolerance + 5 mm)
- when choosing a different length of profiles / covers than available in the standard, you should additionally choose the cutting service at KLUŚ

TECHNICAL DRAWING

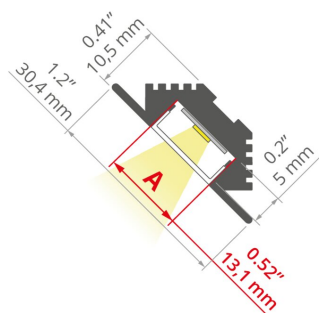

TECHNICAL SPECIFICATIONS

Material	aluminum
Color	■ silver anodized
Possible fixture IP	20, 65
Possible fixture shapes	linear, polygonal
Profile cross-section	angled
Width	30.4 mm
Height	10.5 mm
LED gluing width A	13.1 mm
Number of LED strips A (8 mm wide)	1
Lighting at an angle	45
Building type	Residential, Retail, HoReCa object
Facility zone	office, kitchen, bathroom, furniture, niche/cove, advertising / POS, shop windows and exhibition
Wire out back of extrusion	yes


Length	Ref
1000 mm	A04370A_1 B4370ANODA_1
2005 mm	A04370A_2 B4370ANODA_2
3010 mm	A04370A_3 B4370ANODA_3

Profile PAC-ALU




Ref. A04370

Ref. arch B4370

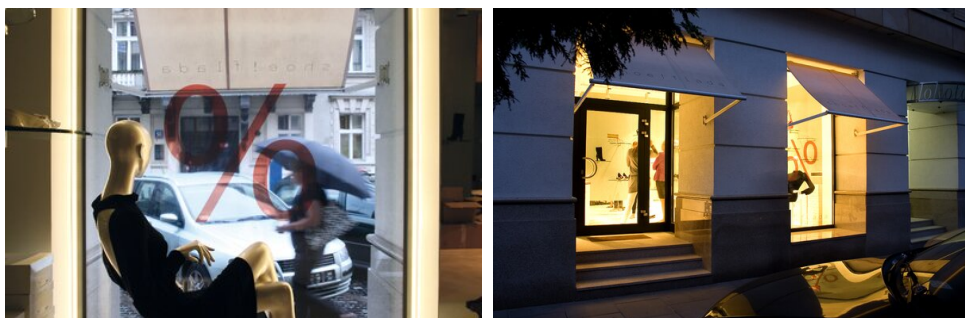
SAMPLE PROJECTS




RELATED ACCESSORIES > RELATED COVERS

NAME	MATERIAL	MATERIAL TRANSMITTANCE	COLOR	REF.
KA-PRO-12		74 %	<input type="checkbox"/> frosted	B17066M 17066
		94 %	<input checked="" type="checkbox"/> clear	B17066T 17067
KA-12		69 %	<input type="checkbox"/> frosted	B17078M 17078
		94 %	<input checked="" type="checkbox"/> clear	B17078T 17079
HS-12		73 %	<input type="checkbox"/> frosted	B17201M 00157
		94 %	<input checked="" type="checkbox"/> clear	B17201T 00158

RELATED ACCESSORIES > RELATED END CAPS

NAME	MATERIAL	COLOR	REF.
PAC-ALU	 PP	<input checked="" type="checkbox"/> gray	C20107C02 00084


RELATED ACCESSORIES > RELATED LED




K-1210-12V
K-1210-12
Ref. arch K-1210-12V



K-1275-12V
K-1275-12
Ref. arch K-1275-12V



WP-K-1220-12V
KWP-1220-12
Ref. arch WP-K-1220-12V



WP-K-1275-12V
KWP-1275-12
Ref. arch WP-K-1275-12V



WP-K-1220-IP65-12V
_błąd
Ref. arch WP-K-1220-IP65-12V

Profile PAC-ALU

Ref. A04370

Ref. arch B4370




K-1275-RGB-12V

K-RGB-1275-12

Ref. arch K-1275-RGB-12V


RELATED ACCESSORIES > RELATED LED > HIGH EFFICACY

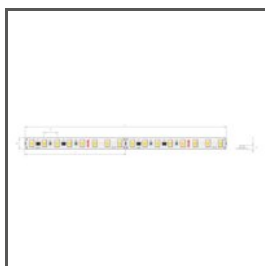

K-HE-0480-HD-24V

K-HEHD-0480-24


Ref. arch K-HE-0480-HD-24V



K-HE-0960-HD-24V

K-HEHD-0960-24


Ref. arch K-HE-0960-HD-24V

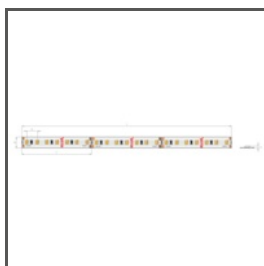

K-HE-1440-HD-24V

K-HEHD-1440-24

Ref. arch K-HE-1440-HD-24V

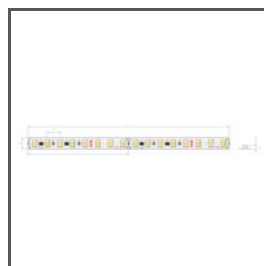

K-HE-1920-HD-24V

K-HEHD-1920-24

Ref. arch K-HE-1920-HD-24V

RELATED ACCESSORIES > RELATED LED > RGB / RGB-W / RGB-CTT



K-1530-RGB+W-24V

K-RGBW-1530-24


Ref. arch K-1530-RGB+W-24V



K-1920-120-RGB-24V

K-RGB-1920-120-24

Ref. arch K-1920-120-RGB-24V

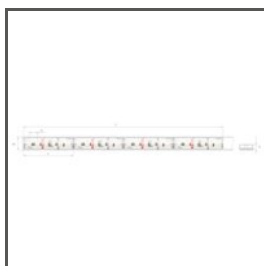

WP-K-1920-120-RGB-24V

KWP-1920-120-RGB-24

Ref. arch WP-K-1920-120-RGB-24V

RELATED ACCESSORIES > RELATED LED > WHITE MONO



WP-K-1640-HD-IP65-24V

KWP-GHD-1640-24

Ref. arch WP-K-1640-HD-IP65-24V



WP-K-1910-HD-IP65-24V

KWP-GHD-1910-24

Ref. arch WP-K-1910HDIP6524V



WP-K-1220-IP65-24V

KWP-1220-IP65-24

Ref. arch WP-K-1220-IP65-24V

Profile PAC-ALU

Ref. A04370

Ref. arch B4370

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > CONNECTORS



CONNECTOR

ZM-180

C28075N00

Ref. arch 40693

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > OTHER



GLAND

6x1,2

C24517C07

Ref. arch 00802