


# Profile EX-ALU

Ref. A18043

Ref. arch 18043

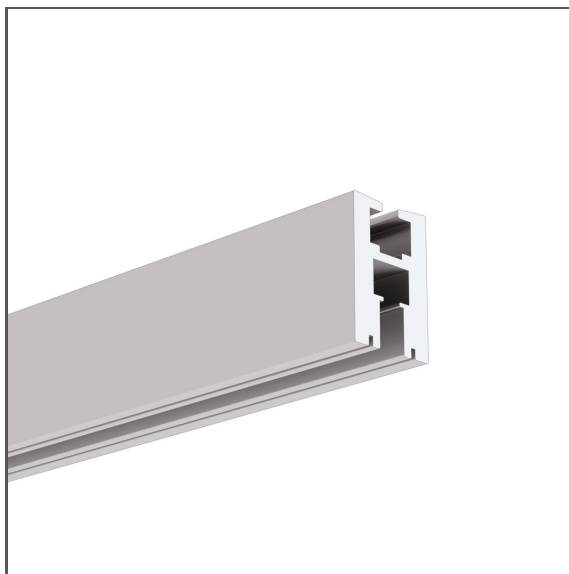

IP20



- Backlight and attachment for transparent panels with a thickness of 6 mm | 0.24"
- High mechanical resistance

## APPLICATION

- surface mounting and decorative illumination of transparent signs and panels


## MOUNTING

- to the surface, using properly selected screws

## ADDITIONAL INFORMATION

- with a vertically attached profile, the panel must not protrude more than 51 cm from the wall. Its vertical dimension must not be less than 60% of the horizontal dimension
- with a horizontally attached profile, the panel must not protrude more than 51 cm from the ceiling
- standard lengths of KLUŚ profiles and covers: 1000 mm (tolerance  $\pm 1.5$  mm) and 2005 mm / 3010 mm (tolerance + 5 mm); for selected covers: 6050 mm, 10050 mm (tolerance + 5 mm)
- when choosing a different length of profiles / covers than available in the standard, you should additionally choose the cutting service at KLUŚ

## TECHNICAL DRAWING

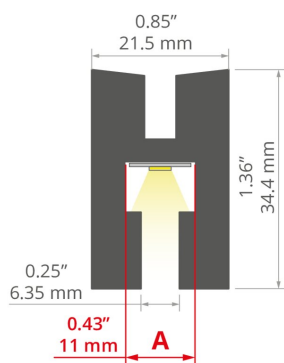

## TECHNICAL SPECIFICATIONS

Material	aluminum
Color	■ silver anodized
Possible fixture IP	20
Possible fixture shapes	linear
Profile cross-section	rectangular
Width	21.5 mm
Height	34.4 mm
LED gluing width A	11 mm
Number of LED strips A (8 mm wide)	1
Building type	Retail, Entertainment/ Arts, HoReCa object, Residential
Facility zone	kitchen, bathroom, furniture, advertising / POS, shop windows and exhibition
Wire out back of extrusion	yes


Length	Ref
1000 mm	A18043A_1 18043ANODA_1
2005 mm	A18043A_2 18043ANODA_2
3010 mm	A18043A_3 18043ANODA_3

# Profile EX-ALU

Ref. A18043

Ref. arch 18043


## SAMPLE PROJECTS

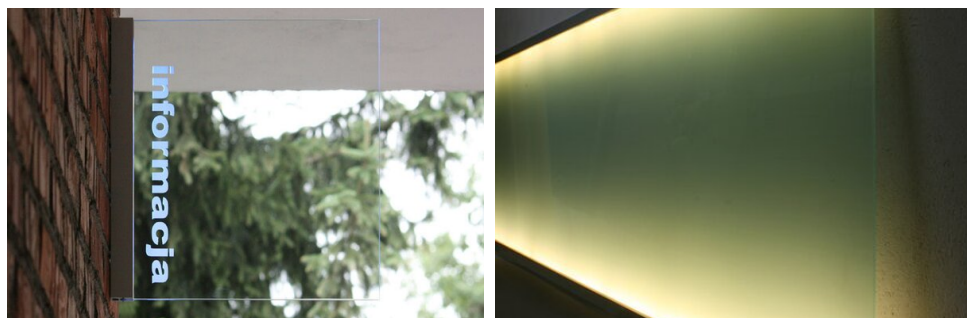

## RELATED ACCESSORIES > RELATED END CAPS

NAME		MATERIAL	COLOR	REF.
EX		steel	■ gray	C24437N00 0963
EX-3D		PU	□ white	C24363C10 0962
EX-3D-OTW		PU	□ white	C24363C10TW 1452

## RELATED ACCESSORIES > RELATED LED



**K-1210-12V**  
K-1210-12  
Ref. arch K-1210-12V



**K-1275-12V**  
K-1275-12  
Ref. arch K-1275-12V




**WP-K-1220-12V**  
KWP-1220-12  
Ref. arch WP-K-1220-12V



**WP-K-1275-12V**  
KWP-1275-12  
Ref. arch WP-K-1275-12V



**WP-K-1220-IP65-12V**  
\_błąd  
Ref. arch WP-K-1220-IP65-12V

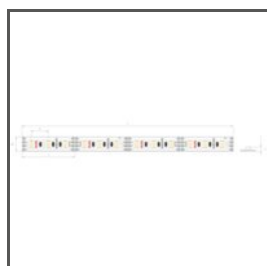


**K-1275-RGB-12V**  
K-RGB-1275-12  
Ref. arch K-1275-RGB-12V

# Profile EX-ALU

Ref. A18043

Ref. arch 18043


## RELATED ACCESSORIES > RELATED LED > HIGH EFFICACY

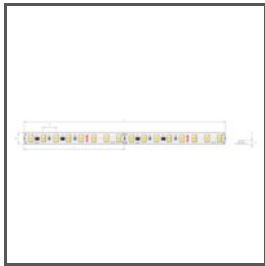

**K-HE-0480-HD-24V**

K-HEHD-0480-24

Ref. arch K-HE-0480-HD-24V



**K-HE-0960-HD-24V**

K-HEHD-0960-24


Ref. arch K-HE-0960-HD-24V



**K-HE-1440-HD-24V**

K-HEHD-1440-24

Ref. arch K-HE-1440-HD-24V



**K-HE-1920-HD-24V**

K-HEHD-1920-24

Ref. arch K-HE-1920-HD-24V


## RELATED ACCESSORIES > RELATED LED > RGB / RGB-W / RGB-CTT



**K-1530-RGB+W-24V**

K-RGBW-1530-24

Ref. arch K-1530-RGB+W-24V



**K-1920-120-RGB-24V**

K-RGB-1920-120-24

Ref. arch K-1920-120-RGB-24V



**WP-K-1920-120-RGB-24V**

KWP-1920-120-RGB-24

Ref. arch WP-K-1920-120-RGB-24V

## RELATED ACCESSORIES > RELATED LED > WHITE MONO



**WP-K-1640-HD-IP65-24V**

KWP-GHD-1640-24

Ref. arch WP-K-1640-HD-IP65-24V



**WP-K-1910-HD-IP65-24V**

KWP-GHD-1910-24

Ref. arch WP-K-1910HDIP6524V



**WP-K-1220-IP65-24V**

KWP-1220-IP65-24

Ref. arch WP-K-1220-IP65-24V

## RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > OTHER



GLAND

**6x1,2**

C24517C07

Ref. arch 00802